# SDX HERMOBOX Keeping the right temperature



## PRODUCT CATALOGUE

2023/2024

Hofland grootkeuken Glasblazerstraat 10 2984 BL Ridderkerk info@hoflandgrootkeuken.nl +31 180 417533









REV. 230418

## SDX THERMOBOX Keeping the right temperature

SDX THERMOBOX

2

## CONTENT

	SDX® THERMOBOX® Transportation of hot and cold food in a hygienic and sustainable way for both humans and the environment	4
	<b>NEUTRAL THERMOBOX<sup>®</sup> – S</b> SDX can provide a full range of neutral thermobox options which include insulation only.	12
*	<b>COOLED THERMOBOX<sup>®</sup> – K</b> Extremely efficient compressor cooling provides the highest refrigeration standard.	16
M	HEATED THERMOBOX® – F Convection heat with added value and benefits! Short heating time. Hot air fan to compensate for temperature losses.	22
lk	<b>COMBINATION THERMOBOX® – SF &amp; KF</b> Combination with cooling and heating in the same Thermobox®.	26
GN 2/1	THERMOBOX® BANQUET For transporting Gastronorm 2/1 containers	34
	THERMOBOX <sup>®</sup> – HEATING CABINET	36
	OPTIONS AND ACCESSORIES	38
	PORTABEL THERMOBOX®	44
	TROLLEYS	45
	IDESTA CONTAINERS	46

All previous catalogs are hereby canceled and superseded. The images and product features contained therein are protected by copyright. They may only be used or reproduced with the permission of SDX\* Thermobox\*, the owner of all trademarks and intellectual property rights. Prices and product facts may vary due to changes or printing errors. At the bottom of each page, you will find the current revision number.

## SDX THERMOBOX Keeping the right temperature





Sensitive ingredients require high temperature control to reach their full potential. How they are prepared and processed makes a significant impact on the quality of the meal.



The ingredients are cooked and turned into a meal. The right temperature is necessary to create the perfect result.



All meals must be transported at the right temperature, with quality and food safety maintained. A well-designed and lightweight construction saves space, making transportation more efficient and saving resources.



The ingredients, the preparation and the gentle transport at the right temperature in the SDX® Thermoboxes. Everything works together to ensure that the end result is a delicious meal.

## **SDX** THERMOBOX

# Engineered to transport food...

At SDX<sup>®</sup> Thermobox<sup>®</sup> we are both conservative and innovative at the same time. We utilize the latest technology and we listen closely to the wishes of our customers. However, we do not make any changes before we are truly convinced that they will also bring improvements.

We are thorough in all aspects. They should be ergonomic, functional, and especially durable.

Keeping your food at the right temperature day after day is what matters most to us.

### ... at the right temperature

The right temperature is extremely critical from a number of perspectives. Both to maintain the high quality and taste of the food, and to satisfy hygiene requirements.

This is accomplished by using digital controls to regulate the temperature and well-insulated boxes to maintain it during transport.

### ... with low energy consumption

To ensure the most effective insulation properties, the boxes are insulated with polyurethane, which expands under high pressure and combines the outer and inner containers to form a strong and well-insulated unit. This ensures that food is stored at the correct temperature with very low power consumption and low operating costs.

### Hygienic food handling

The completely stainless steel interior with no joints or recesses is the obvious choice for hygienic food handling. Guides are pressed out of stainless steel, a unique technology that provides unsurpassed durability, increases safety, and simplifies cleaning.

### ... in a ergonomic and economic way

The functional and straightforward design in combination with the free-rolling wheels makes transport from kitchen to diner simple and ergonomic.

An SDX<sup>®</sup> Thermobox<sup>®</sup> is designed to be compact and lightweight, which minimises the space required during both storage and transport. This saves both resources and the environment.

Smooth storage surface with the possibility for securing loads

Electronically adjustable temperature control

Deep drawn guides, easy cleaning and increased safety


Weights up to 30 kg can be handled by a pair of guides.

Short heating or cooling time

Welded stainless steel inside containers with smooth surfaces, high durability and the best hygiene properties

> Durable door gaskets

Easy to clean for improved hygiene





S DEGENERATORON



## **SDX** THERMOBOX

## A complete range for all your transport needs.

We offer a range of products spanning from the insulated S-box to advanced cooling and heating systems in the K- and F-boxes.



**WWW.SDX.SE** provides information about our full product portfolio with accessories





#### THERMOBOX<sup>®</sup> K ECO COMPRESSOR COOLING

K-boxes are excellent for food that is to be served cold, and for transporting and storing food that is to be heated up subsequently.



#### THERMOBOX° S ISOLATED BOX

S-boxes are ideal for food that is to be served cold as well as for transporting and storing food that is to be heated at a later stage in the process.

# HEATED

#### THERMOBOX® F CONVECTION HEATING

F-boxes are ideal for storing hot food where the quality of the food is maintained during transport.


## 

#### THERMOBOX° SF & KF

Transportation of both hot and cold food in the same Thermobox.

## **Technical summary**





INNER CONTAINER	Fully welded container in stainless steel.			
GUIDES	Stainless steel, pressed from the inner container.			
CAPACITY GN1/1	4 6 8 10 12 14 8+8 10+10 12+12 14+14 12+12+12 			
SPACING	80mm			
MAXIMUM LOAD	30 kg per pair of guides			
INSULATION:	Polyurethane.			
DOOR	Recessed for best insulation properties, internal surface made of smooth and seamless stainless steel.			
EXTERIOR WALLS AND DOOR	ABS plastic.			
TOP FRAME	A stable and protective frame with PVC corners.			
TROLLEY FRAME:	Reject list of stainless steel coated with PVC.			
WHEELS	160 mm wheels, two brakeable and two fixed.			
VOLT	230v - 230v			
EFFECT	190w - 550w/1000w			

# THERMOBOX<sup>®</sup> S

A neutral, well insulated box that you cool down by putting it in a cold store or using the SDX<sup>®</sup> Cooling Plate.

The interior is made entirely of stainless steel with pressed guides and no joints. Insulated with polyurethane, which expands under high pressure and combines the outer and inner containers to form a strong and well insulated unit.



**WWW.SDX.SE** provides information about our full product portfolio and accessories.



#### TECHNICAL SPECIFICATIONS

Exterior walls: ABS plastic.

**Inner container:** Welded container in stainless steel.

**Guides:** Stainless steel, pressed from the inner container. Maximum load per pair of guides is 30 kg.

Insulation: Polyurethane.

**Door:** Internal surface made of smooth and seamless stainless steel. Exterior in ABS plastic.

Wheels: 160 mm wheels, two brakeable and two fixed.

**Top frame:** A stable and protective frame with PVC corners.

**Trolley frame:** Reject list of stainless steel coated with PVC.

S: Neutral, IP44 rated.

#### $\textbf{THERMOBOX}^{\circ} \textbf{S} \textbf{ - NEUTRAL THERMOBOX}$

A full range of neutral thermobox options which include insulation only.

560	GUIDES	OUTER	INNER	WEIGHT
	4 x GN 1/1 80mm spacing	W: 525mm D: 710mm H: 870mm	w: 330mm D: 540mm H: 350mm	37 kg
	Product number: SDX Thermobox S6	: 122005-ZS 50 (4 GN 1/1) One grip ha	ndle	

S90	GUIDES	OUTER	INNER	WEIGHT	
	6 x GN 1/1 80mm spacing	W: 525mm D: 710mm H: 1030mm	W: 330mm D: 540mm H: 510mm	41 kg	
	Product number: SDX Thermobox S9	122003-ZS 0 (6 GN 1/1) One grip h	andle		

S120	GUIDES	OUTER	INNER	WEIGHT
	8 x GN 1/1 80mm spacing	W: 525mm D: 710mm H: 1190mm	W: 330mm D: 540mm H: 670mm	45 kg
	Product number: 12 SDX Thermobox S120	2039-ZS (8 GN 1/1) One grip handle		

4

8

#### THERMOBOX°S - NEUTRAL THERMOBOX

A full range of neutral thermobox options which include insulation only.

S150	GUIDES	OUTER	INNER	WEIGHT
	10 x GN 1/1 80mm spacing	W: 525mm D: 710mm H: 1155mm	B: 330mm D: 540mm H: 830mm	47 kg
	Product number: 122 SDX Thermobox S150	2040-ZS (10 GN 1/1) One grip handle	2	

S180	GUIDES	OUTER	INNER	WEIGHT
	12 x GN 1/1 80mm spacing	W: 525mm D: 710mm H: 1330mm	W: 330mm D: 540mm H: 1000mm	50 kg
	Product number: 122 SDX Thermobox S180 (	, 12 GN 1/1) One grip handle	2	

SS180	GUIDES	OUTER	INNER	WEIGHT
	6 + 6 x GN 1/1 80mm spacing	W: 525mm D: 710mm H: 1420mm	W: 330mm D: 540mm H: 510+510mm	60 kg
	Product number: 122 SDX Thermobox SS180	2101-ZS ) (6+6 GN 1/1) One grip har	idle	

#### $\textbf{THERMOBOX}^{\circ} \textbf{S} \textbf{ - NEUTRAL THERMOBOX}$

A full range of neutral thermobox options which include insulation only.

S210	GUIDES	OUTER	INNER	WEIGHT
	14 x GN 1/1 80mm spacing	W: 525mm D: 710mm H: 1490mm	W: 330mm D: 540mm H: 1160mm	56 kg
		2075-ZS (14 GN 1/1) One grip handle s on the sides are included		<u>.</u>

SS360	GUIDES	OUTER	INNER	WEIGHT
	12 + 12 x GN 1/1 80mm spacing	W: 935mm D: 710mm H: 1330mm	W: 330+330mm D: 540mm H: 1000mm	100 kg
	Product number: 122 SDX Thermobox SS360	2045-ZS 9 (12+12 GN 1/1) One grip h	andle	

SSS540	GUIDES	OUTER	INNER	WEIGHT
	12+12+12 x GN 1/1 80mm spacing	W: 1360mm D: 700mm H: 1330mm	W: 330+330+330mm D: 540mm H: 1000mm	150 kg
	Product number: 12205 SDX Thermobox SSS540 (		e grip handle	

 $\equiv$ 

14

12|12|12



## THERMOBOX<sup>®</sup> K ECO

The new generation of compressor-based refrigerated containers from SDX represents a giant leap forward in the development of compressor cooling technology. The K-boxes comprise a completely redesigned refrigeration unit featuring the eco-friendly refrigerant R290A. The total height and weight are lower. Introducing advanced, highly efficient RPM-controlled fans, where noise levels have been reduced by half to improve the working environment. Just like previous generations, the inside is made completely of stainless steel, with pressed guides and no joints. Insulated with polyurethane, which expands under high pressure and combines the outer and inner containers to form a strong and well insulated unit. Located on the top edge of the Thermobox is a digital control unit for setting and monitoring temperature.

K-boxes are excellent for food that is to be served cold, and for transporting and storing food that is to be heated up subsequently.



**WWW.SDX.SE** provides information about our full product portfolio and accessories.



#### TECHNICAL SPECIFICATIONS

Exterior walls: ABS plastic.

**Inner container:** Welded container in stainless steel.

**Guides:** Stainless steel, pressed from the inner container. Maximum load per pair of guides is 30 kg.

Insulation: Polyurethane.

**Door:** Internal surface made of smooth and seamless stainless steel. Exterior in ABS plastic.

**Wheels:** 160 mm wheels, two brakeable and two fixed.

**Top frame:** A stable and protective frame with PVC corners.

**Trolley frame:** Reject list of stainless steel coated with PVC.

K: Efficient compressor refrigeration. Eco-friendly refrigerant (R290A) Lownoise, RPM-controlled fans. Digital temperature regulation. IP44 rated

## Reducing the Environmental Impact of Food Transport



A new generation of refrigerated Thermoboxes for a sustainable future 4

#### $\textbf{THERMOBOX}^{\circ} \text{ K ECO} - \textbf{COMPRESSOR COOLING}$

Extremely efficient compressor cooling provides the highest refrigeration standard.

K60 ECO	GUIDES	OUTER	INNER	WEIGHT
	4 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 925mm	W: 330mm D: 540mm H: 350mm	65 kg
	230V/190W <b>Product number:</b> 122 SDX Thermobox K60 E	2206-ZK ECO (4 GN 1/1) One grip ha	ndle	

K90 ECO	GUIDES	OUTER	INNER	WEIGHT
	6 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1085mm	B: 330mm D: 540mm H: 510mm	70 kg
	230V/190W Product number: SDX Thermobox K9	122207-ZK 0 ECO (6 GN 1/1) One gri	p handle	

K120 ECO	GUIDES	OUTER	INNER	WEIGHT
	8 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1245mm	W: 330mm D: 540mm H: 670mm	73 kg
	230V/190W <b>Product number</b> SDX Thermobox K	: 122205-ZK 120 ECO (8 GN 1/1) One gi	rip handle	

10

#### THERMOBOX° K ECO – COMPRESSOR COOLING

Extremely efficient compressor cooling provides the highest refrigeration standard.

K150 ECO	GUIDES	OUTER	INNER	WEIGHT
	10 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1430mm	W: 330mm D: 540mm H: 825mm	75 kg
	230V/190W <b>Product number:</b> 12 SDX Thermobox K150	2208-ZK ECO (10 GN 1/1) One grip h	nandle	

K180 ECO	GUIDES	OUTER	INNER	WEIGHT
	12 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1575mm	W: 330mm D: 540mm H: 1000mm	77 kg
		2270-ZK ECO (12 GN 1/1) One grip h s on the sides are included		

K210 ECO	GUIDES	OUTER	INNER	WEIGHT
	14 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1735mm	W: 330mm D: 540mm H: 1160mm	83 kg
		122209-ZK 10 ECO (14 GN 1/1) One o les on the sides are incl		,

12

8|8 

#### THERMOBOX° K ECO – COMPRESSOR COOLING

Extremely efficient compressor cooling provides the highest refrigeration standard.

KK240 ECO	GUIDES	OUTER	INNER	WEIGHT
	8+8 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1245mm	W: 330+330mm D: 540mm H: 670mm	150kg
	2 x 230V/190W <b>Product number:</b> SDX Thermobox KK	22272-ZKK 240 ECO (8+8 GN 1/1) On	e grip handle	

KK300 ECO	GUIDES	OUTER	INNER	WEIGHT
	10+10 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1400mm	W: 330+330mm D: 540mm H: 825mm	160kg
	2 x 230V/190W <b>Product number:</b> 122 SDX Thermobox KK30	273-ZKK 0 ECO (10+10 GN 1/1) One	grip handle	



10|10 

20

#### **TEMPERATURE CONTROL**

C

Keep the right temperature easily with just a few taps. Adjust the temperature on the display to the optimal one for the particular food you are transporting or storing.

# THERMOBOX<sup>®</sup> F

With efficient convection heating and hot-air fans to maintain a uniform temperature throughout the box. The flow of hot air forms a buffer around the food, which compensates for undesirable heat losses. Located on the top edge of the Thermobox is a digital control unit for setting and monitoring temperature.

The interior is made entirely of stainless steel with pressed guides and no joints. Insulated with polyurethane, which expands under high pressure and combines the outer and inner containers to form a strong and well insulated unit.

F-boxes are ideal for storing hot food where the quality of the food is maintained during transport.



**WWW.SDX.SE** provides information about our full product portfolio and accessories.



#### TECHNICAL SPECIFICATIONS

Exterior walls: ABS plastic.

Inner container: Welded container in stainless steel.

**Guides:** Stainless steel, pressed from the inner container. Maximum load per pair of guides is 30 kg.

Insulation: Polyurethane.

**Door:** Internal surface made of smooth and seamless stainless steel. Exterior in ABS plastic.

**Wheels:** 160 mm wheels with rubber tires, two brakeable and two fixed.

**Top frame:** A stable and protective frame with PVC corners.

**Trolley frame:** Reject list of stainless steel coated with PVC.

**F:** Efficient convection heating system, with electronic temperature control. IP44 rated.

#### $\textbf{THERMOBOX}^{\circ} \ \textbf{F} - \textbf{CONVECTION HEATING}$

Convection heat with added value and benefits! Short heating time. Hot air fan to compensate for temperature losses.

F60	GUIDES	OUTER	INNER	WEIGHT
	4 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 895mm	W: 330mm D: 540mm H: 350mm	41 kg
	230V/550W <b>Product number: 1</b> 22 SDX Thermobox F60 (4	2006-ZF 4 GN 1/1) One grip handle	·	·

F90	GUIDES	OUTER	INNER	WEIGHT
	6 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1055mm	W: 330mm D: 540mm H: 510mm	45 kg
	230V/550W <b>Product number:</b> 122 SDX Thermobox F90 (6	2004-ZF 6 GN 1/1) One grip handle	-	

F120	GUIDES	OUTER	INNER	WEIGHT
	8 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1215mm	W: 330mm D: 540mm H: 670mm	49 kg
	230V/550W <b>Product number:</b> 122 SDX Thermobox F120 (	2027-ZF 28 GN 1/1) One grip handle		1

F150	GUIDES	OUTER	INNER	WEIGHT
	10 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1180mm	W: 330mm D: 540mm H: 830mm	61 kg
	230V/1000W <b>Product number:</b> 122 SDX Thermobox F150 (	2064-ZF (10 GN 1/1) One grip handle		

F180 CLASSIC	GUIDES	OUTER	INNER	WEIGHT
e	12 x GN 1/1 80mm spacing	W: 525mm D: 700mm H: 1330mm	W: 330mm D: 540mm H: 1000mm	57 kg
C C	230V/1000W <b>Produktnummer:</b> 122 SDX Thermobox F180 ( With analog thermome	Classic (12 GN 1/1) One grip	b handle	1

 $\mathcal{M}$ 

4

**6** 

8

10

12

12

6 6 6

14

#### $\textbf{THERMOBOX}^{\circ} \ \textbf{F} - \textbf{CONVECTION HEATING}$

Convection heat with added value and benefits! Short heating time. Hot air fan to compensate for temperature losses.

2 x GN 1/1 30mm spacing	W: 525mm	W: 330mm	57 kg		
	D: 770mm H: 1355mm	D: 540mm H: 1000mm			
230V/1000W Product number: 122033-ZF SDX Thermobox F180 (12 GN 1/1) One grip handle					

FF180	GUIDES	OUTER	INNER	WEIGHT
	6+6 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1445mm	W: 330mm D: 540mm H: 510+510mm	65 kg
	2 x 230V/550W <b>Product number:</b> 12 SDX Thermobox FF18	22134-ZF 30 (6+6 GN 1/1) One grip har	ndle	

F210	GUIDES	OUTER	INNER	WEIGHT
	14 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1515mm	W: 330mm D: 540mm H: 1160mm	64 kg
		2070-ZF (14 GN 1/1) One grip handle s on the sides are included		

FF210	GUIDES	OUTER	INNER	WEIGHT
	8+6 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1605mm	W: 330mm D: 540mm H: 670+510mm	70 kg
		122135-ZF 210 (8+6 GN 1/1) One grip Iles on the sides are incl		

<u>6</u> 8

#### $\textbf{THERMOBOX}^{\circ} \ \textbf{F} - \textbf{CONVECTION HEATING}$

Convection heat with added value and benefits! Short heating time. Hot air fan to compensate for temperature losses.

FF240	GUIDES	OUTER	INNER	WEIGHT
	8+8 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1215mm	W: 330+330mm D: 540mm H: 670+670mm	110 kg
	2 x 230V/550W <b>Product number:</b> 12 SDX Thermobox FF24	2132-ZF 0 (8+8 GN 1/1) One grip hai	ndle	

FF360	GUIDES	OUTER	INNER	WEIGHT
	12+12 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1355mm	W: 330+330mm D: 540mm H: 1000mm	114 kg
	2 x 230V/1000W <b>Product number:</b> 122 SDX Thermobox FF360	2048-ZF D (12+12 GN 1/1) One grip h	andle	

FF420	GUIDES	OUTER	INNER	WEIGHT
	14+14 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1515mm	W: 330+330mm D: 540mm H: 1160mm	128 kg
	H: 1515mm     H: 1160mm       2 x 230V/1000W     Product number: 122057-ZF       SDX Thermobox FF420 (14+14 GN 1/1) One grip handle       Additional pull handles on the sides are included			

FFF540	GUIDES	OUTER	INNER	WEIGHT
	12+12+12 x GN 1/1 80mm spacing	W: 1360mm D: 770mm H: 1355mm	W: 330+330+330mm D: 540mm H: 1000mm	195 kg
	3 x 230V/1000W <b>Product number:</b> 122 SDX Thermobox FFF54	136-ZF 40 (12+12+12 GN 1/1) One gi	rip handle	

```
m
```

8|8

12|12

14|14

12|12|12



# A successful combination!

To meet different needs, SDX<sup>®</sup> has many solutions for a successful combination with cooling and heating in the same Thermobox<sup>®</sup>. All variants have the renowned quality of SDX<sup>®</sup> and contains all-stainless steel interiors with pressed guides.



#### THERMOBOX<sup>®</sup> SF

These Thermoboxes are capable of transporting both hot and cold food at the same time. One part of the unit is neutral, while the other part is heated by convection.

# HEATED

#### THERMOBOX<sup>®</sup> KF

These Thermoboxes are capable of transporting both hot and cold food at the same time. Compressor cooling is used one part, while convection heating is used in the other part.

## **Technical summary**

SERIES	SF	KF			
COLOUR	BLACK/RED	BLUE/RED			
ТҮРЕ	NEUTRAL & HEATING	COOLED & HEATED			
TECHNOLOGY	ISOLATION ONLY & CONVECTION HEATING	COMPRESSOR COOLING & CONVECTION HEATING			
INNER CONTAINER	Fully welded container in stainless steel.				
GUIDES	Stainless steel, pressed from the inner container.				
SPACING	80	)mm			
MAXIMUM LOAD	30 kg per p	pair of guides			
INSULATION:	Polyu	rethane.			
DOOR	Recessed for best insulation properties, internal surface made of smooth and seamless stainless steel.				
EXTERIOR WALLS AND DOOR	ABS plastic.				
TOP FRAME	A stable and protective	frame with PVC corners.			
TROLLEY FRAME:	Reject list of stainless	steel coated with PVC.			
WHEELS	160 mm wheels, two b	prakeable and two fixed.			





# Make your own combination



In case you are having difficulty finding the right combination for your needs, we can help you create your own Thermobox<sup>®</sup>. We can combine all our modules from the smallest volume with 4 guides to our largest volume with 14 guides.

Contact us about your food transportation needs and we will provide you with a solution.

#### **KEEPING ERGONOMICS IN MIND**

Our Thermobox K ECO, and Combinations with K ECO, has a low center of gravity thanks to the compressor cooling unit placed at the bottom. As a result, both human power and truck transport become more stable and easier.

SONTHIRMOBOX

#### THERMOBOX<sup>®</sup> SF

Exterior walls: ABS plastic.

**Inner container:** Welded container in stainless steel.

**Guides:** Stainless steel, pressed from the inner container. Maximum load per pair of guides is 30 kg.

Insulation: Polyurethane.

**Door:** Internal surface made of smooth and seamless stainless steel. Exterior in ABS plastic.

Wheels: 160 mm wheels, two brakeable and two fixed.

**Top frame:** A stable and protective frame with PVC corners.

**Trolley frame:** Reject list of stainless steel coated with PVC.

S: Neutral. IP44 rated.

**F:** Efficient convection heating system, with electronic temperature control. IP44 rated.

SF150	GUIDES	OUTER	INNER S	INNER F	WEIGHT	
	4+6 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1285mm	W: 330mm D: 540mm H: 510mm	W: 330mm D: 540mm H: 350mm	60 kg	
	Product number	Neutral + 230V/550W <b>Product number:</b> 122060-ZSF SDX Thermobox SF150 (4+6 GN 1/1) One grip handle				

SF180	GUIDES	OUTER	INNER S	INNER F	WEIGHT
	6+6 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1445mm	W: 330mm D: 540mm H: 510mm	W: 330mm D: 540mm H: 510mm	62 kg
	Neutral + 230V/550 <b>Product number:</b> SDX Thermobox SF <sup>2</sup>	122105-ZSF	e grip handle		

SF210	GUIDES	OUTER	INNER S	INNER F	WEIGHT
	4+10 x GN 1/1 80mm spacing	W: 525mm D: 770mm H: 1605mm	W: 330mm D: 540mm H: 830mm	W: 330mm D: 540mm H: 350mm	80 kg
			0 1		

#### THERMOBOX<sup>®</sup> SF

Neutral and convection heating combination.

 $\mathcal{W}$ 

 $\equiv$ 

8|8

SF240	GUIDES	OUTER	INNER S	INNER F	WEIGHT
	8+8 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1215mm	W: 330mm D: 540mm H: 670mm	W: 330mm D: 540mm H: 670mm	90 kg
	Neutral + 230V/550 <b>Product number:</b> SDX Thermobox SF	122066-ZSF	e grip handle		

SF360	GUIDES	OUTER	INNER S	INNER F	WEIGHT
	12 + 12 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1355mm	W: 330mm D: 540mm H: 1000mm	W: 330mm D: 540mm H: 1000mm	115 kg
	Neutral + 230V/1000 <b>Product number:</b> SDX Thermobox SF3	122046-ZSF	ne grip handle	·	

SF420	GUIDES	OUTER	INNER S	INNER F	WEIGHT
	14 + 14 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1515mm	W: 330mm D: 540mm H: 1160mm	W: 330mm D: 540mm H: 1160mm	126 kg
	Neutral + 230V/1000 <b>Product number:</b> SDX Thermobox SF4 Additional pull hand	122067-ZSF 420 (14+14 GN 1/1) Or			

12|12 —

#### THERMOBOX<sup>®</sup> KF

Exterior walls: ABS plastic.

**Inner container:** Welded container in stainless steel.

**Guides:** Stainless steel, pressed from the inner container. Maximum load per pair of guides is 30 kg.

#### Insulation: Polyurethane.

**Door:** Internal surface made of smooth and seamless stainless steel. Exterior in ABS plastic.

Wheels: 160 mm wheels, two brakeable and two fixed.

**Top frame:** A stable and protective frame with PVC corners.

**Trolley frame:** Reject list of stainless steel coated with PVC.

**K:** Efficient compressor refrigeration. Eco-friendly refrigerant (R290A) Low-noise, RPM-controlled fans. Digital temperature regulation. IP44 rated.

**F:** Efficient convection heating system, with electronic temperature control. IP44 rated.

1/5420	<b>FCO</b>	
KF120	ECO	

### 4 4

<u>6</u> 4





GUIDES	OUTER	INNER K	INNER F	WEIGHT
4+4 x GN 1/1 80mm spacing	B: 525mm D: 770mm H: 1345mm	W: 330mm D: 540mm H: 350mm	W: 330mm D: 540mm H: 350mm	80 kg
230V/190W AC + 230 <b>Product number:</b> 1 SDX Thermobox KF1	22221-ZKF	One grip handle		

KF150 ECO	GUIDES	OUTER	INNER K	INNER F	WEIGHT
	4+6 x GN 1/1 80mm spacing	B: 525mm D: 770mm H: 1505mm	W: 330mm D: 540mm H: 350mm	W: 330mm D: 540mm H: 510mm	85 kg
	230V/190W AC + 23 Product number: SDX Thermobox KF1 Additional pull hand	122218-ZKF 150 ECO (4+6 GN 1/1)			

**KF180 ECO** GUIDES OUTER INNER K INNER F WEIGHT 98 kg 6+6 x GN 1/1 W: 525mm W: 330mm W: 330mm D: 540mm D: 540mm 80mm spacing D: 770mm H: 1665mm H: 510mm H: 510mm 230V/190W AC + 230V/550W Product number: 122215-ZKF SDX Thermobox KF180 ECO (6+6 GN 1/1) One grip handle Additional pull handles on the sides are included

<u>6</u> 6

#### THERMOBOX<sup>®</sup> KF

Compressor cooling and convection heating combination.

8|8

10|10

KF240 ECO	GUIDES	OUTER	INNER K	INNER F	WEIGHT
	8+8 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1245mm	W: 330mm D: 540mm H: 670mm	W: 330mm D: 540mm H: 670mm	108 kg
	230V/190W AC + 1 Product number SDX Thermobox k		1/1) One grip handle	2	

KF300 ECO	GUIDES	OUTER	INNER K	INNER F	WEIGHT
	10+10 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1430mm	W: 330mm D: 540mm H: 830mm	W: 330mm D: 540mm H: 830mm	120 kg
	230V/190W AC + 23 Product number: SDX Thermobox KF	122219-ZKF	1/1) One grip handl	e	

KF360 ECO	GUIDES	OUTER	INNER K	INNER F	WEIGHT
	12+12 x GN 1/1 80mm spacing	W: 930mm D: 770mm H: 1575mm	W: 330mm D: 540mm H: 1000mm	W: 330mm D: 540mm H: 1000mm	150 kg
R C					

12|12



## Banquet edition for great transports



SDX<sup>®</sup> Thermobox<sup>®</sup> Banquet is created for you to transport and serve large quantities of food quickly and efficiently. Ideal for stadiums, hotels and conference centers. The box's large volume, combined with several guides creates a flexible and efficient food transport.

#### SDX° THERMOBOX° BANQUET

For transporting Gastronorm 2/1 containers

	GUIDES	OUTER	INNER	WEIGHT	
	17 x GN 2/1 80mm spacing	W: 790mm D: 890mm H: 1740mm	W: 535mm D: 667mm H: 1405mm	109 kg	
	Product number SDX Thermobox B	: 122252-ZS ANQUET S (17 GN 2/1)	One grip handle		
	TECHNICAL SPECIFIC Exterior walls: ABS pla: Inner container: Welde Guides: Stainless steel Insulation: Polyurethan	stic. d container in aluminium. guides with rivets.	Door: Interior made of stainles: ABS plastic. Wheels: 160 mm wheels, two br. Trolley frame: Reject list of stain with PVC.	akeable and two fixed.	
ERMOBOX <sup>®</sup> K ECO - BANQUET	GUIDES	OUTER	INNER	WEIGHT	
	13 x GN 2/1 80mm spacing	W: 790mm D: 890mm H: 1740mm	W: 535mm D: 667mm H: 1120mm	138 kg	
	Product number: SDX Thermobox BA	122252-ZK ANQUET K (13 GN 2/1)	One grip handle		
	Guides: Stainless steel Insulation: Polyurethan	stic. d container in aluminium. guides with rivets.	Wheels: 160 mm wheels, two brakeable and two fi Trolley frame: Reject list of stainless steel coated with PVC. K: Efficient convection cooling with electronic ter perature control 230V/190W. IP44 rated.		
ERMOBOX <sup>®</sup> F - BANQUET	GUIDES	OUTER	INNER	WEIGHT	
	17 x GN 2/1 80mm spacing	B: 790mm D: 890mm H: 1740mm	W: 535mm D: 667mm H: 1405mm	109 kg	
	Product number: SDX Thermobox F E	122252-ZF BANQUET (17 GN 2/1)	One grip handle		
	TECHNICAL SPECIFIC Exterior walls: ABS pla		Wheels: 160 mm wheels, two brain Trolley frame: Reject list of stain with PVC.		

\*

17 GN 2/1

**13** GN 2/1

**17** GN 2/1

M



# Stationary heating cabinet.



SDX<sup>®</sup> stationary heating cabinets are made of stainless steel and feature convection heating with stepless adjustment up to 90°C.

The interior is made completely of stainless steel, with pressed guides and no joints – a peerless technique that provides unmatched durability and facilitates cleaning. The polyurethane insulation makes the container a well-insulated unit where the food is stored at the right temperature with extremely low energy consumption. Our stationary heating cabinets are fitted with glass doors as standard.

#### **TECHNICAL SPECIFICATIONS**

Exterior walls: Stainless. Inner container: Fully welded container in stainless steel. Guides: Stainless, pressed from the inner container. Insulation: Polyurethane. Doors: Glass doors with stainless steel fittings. F: Efficient convection heating system, with electronic temperature control. IP44 rated.

**8** GN 1/1

**10** GN 1/1

**12** GN 1/1

#### SDX° THERMOBOX° STATIONARY HEATING CABINET

For Gastronorm 1/1 Containers

F8	GUIDES	OUTER	INNER	WEIGHT
	8 GN 1/1 80mm spacing	W: 405mm D: 730mm H: 1065mm	W: 330mm D: 540mm H: 670mm	65 kg
	230V/550W <b>Product number:</b> SDX Thermobox Sta	122702 tionary heating cabinet	(8 GN 1/1)	

F10	GUIDES	OUTER	INNER	WEIGHT
	10 GN 1/1 80mm spacing	W: 405mm D: 730mm H: 1225mm	W: 330mm D: 540mm H: 830mm	70 kg
	230V/1000W <b>Product number:</b> 1 SDX Thermobox Sta	122701 tionary heating cabinet	(10 GN 1/1)	, ,

F12	GUIDES	OUTER	INNER	WEIGHT
	12 GN 1/1 80mm spacing	W: 405mm D: 730mm H: 1400mm	W: 330mm D: 540mm H: 1000mm	75 kg
	230V/1000W Product number: 12: SDX Thermobox Static	2700 nary heating cabinet (12 G	N 1/1)	

F14	GUIDES	OUTER	INNER	WEIGHT
	14 GN 1/1 80mm spacing	W: 405mm D: 730mm H: 1560mm	W: 330mm D: 540mm H: 1160mm	80 kg
	230V/1000W Product number: SDX Thermobox St	122703 ationary heating cabinet	(14 GN 1/1)	

REV. 230418

**14** GN 1/1

# SDM THERMOBOX Optional extras

We have a wide range of optional extras for the SDX® Thermobox® Please visit www.sdx.se for a complete list of available accessories.





#### **1 STAINLESS EXTERIOR**

Both inside and outside in all stainless. A stylish, even more hygienic choice.

#### 2 LOCKABLE HANDLE

lockable one grip handle Product number: 311 035

#### 3 DRAWER

Single drawer in the base of the Thermobox. With eccentric lock. Product number: 123 030

#### **4 TERRAIN WHEELS**

For smoother transport on uneven surfaces. For single Thermoboxes only. Product number: 123 027 5 COIL CORD Extra long, 5600mm Product number: 312 126

#### 6 ADDRESS CARD HOLDER

**A6** Product number: 255 001 **A5** Product number: 219 028 **A4** Product number: 219 026

For SDX® Thermoboxes.



#### 7 EXTRA HANDLES

Set of 2 pcs. Product number: 212 011

#### 8 TRAYHOLDER

Robust construction to place trays on for easy access. Easy to fold up and down. Product number: 123 032

#### 9 CASTORS 200 MM

Two fixed and two swivel with brakes. Product number: 123 006

#### **10 CENTRAL BRAKE**

Practical and ergonomic central brake simplifies the management of everyday life.160 mm wheels200 mm wheelsProduct number:Product number:123 015123 031

#### **11 WINDOW IN THE DOOR**

Optional glass window in the door allows you to quickly and easily check the contents of your Thermobox® Product number: 123 017

#### 12 LED-LIGHT

For Thermoboxes with glass door. Product number: 123 016

#### **OPTIONAL EXTRAS**

For SDX<sup>®</sup> Thermoboxes.







#### **13** ECCENTRIC LOCK

An eccentric lock can be installed to secure the door instead of the standard one-grip handle Product number: 141 002




#### **14 ONE CABLE**

Connect only one cable to power both units. For side by side Thermoboxes. Product number: 123048

#### **15 THERMAL BARRIER**

Create different temperature zones in a Thermobox<sup>®</sup> S with the Thermal Barrier. **Product number:** 143005

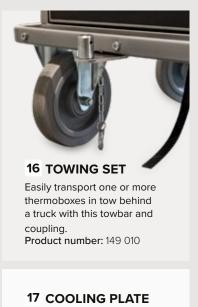

Cooling plate GN 1/1 adapted for Thermobox® S. Including cassette. Product number: 141 002



#### **ONE GRIP HANDLE**

All our boxes are equipped with one grip handles. This means that you only need to have one hand free to easily open your Thermobox<sup>®</sup>, and it is just as easy to close. The handle on the recessed door closes the box well and creates the well-insulated unit that provides the best conditions for safe transport.

**TOP FRAME WITH FUNCTION** Simplifies movement in all directions and makes handling ergonomic.

## **SDX** THERMOBOX

# Unique exterior, the same quality on the inside

SDX<sup>®</sup> gives you the opportunity to create a completely unique Thermobox<sup>®</sup> with your own colour and your own logo.



#### LOGO ON THERMOBOX

Take the next step and customize your Thermobox<sup>®</sup> with your logo. 3 Colours maximum.



#### STANDARD COLOURS

CHOOSE YOUR COLOUR

types of boxes.

Choose the colour of your Thermobox<sup>®</sup>. To suit your interior or to easily distinguish between different

> All our Thermobox<sup>®</sup> can be delivered in one of our three standard colours blue, black or red. Timeless colours that suit all environments and settings.





#### FULLY COSTUMIZED EXTERIOR

Make a statement with a fully customized exterior on your  $\ensuremath{\mathsf{Thermobox}}\xspace^{\otimes}$ 

#### PORTABLE THERMOBOX®

The portable Thermobox<sup>\*</sup> are designed to be compatible with Gastronorm containers, maximum depth 100mm and 200mm respectively.

\$30	GUIDES	MEASUREMENTS		WEIGHT
a contail	4 x GN 1/2 80mm spacing	W: 425mm D: 380mm H: 415mm	W: 330mm D: 265mm H: 325mm	9,5 kg
	Aluminium door with ec Plastic stacking corners		•	

E30	GUIDES	MEASUREMENTS		WEIGHT
areal !!	4 x GN 1/2 80mm spacing	W: 425mm D: 380mm H: 415mm	W: 330mm D: 265mm H: 325mm	10,5 kg
8	Aluminium door with ecce Plastic stacking corners w	and all-welded inner container.		

S600	GUIDES	MEASUREMENTS		WEIGHT
	4 x GN 1/1 80mm spacing	W: 425mm D: 645mm H: 415mm	W: 330mm D: 530mm H: 325mm	13 kg
	Aluminium door with ec Plastic stacking corners			

#### -

E600	GUIDES	MEASUREMENTS		WEIGHT
-	4 x GN 1/1 80mm spacing	W: 425mm D: 645mm H: 415mm	W: 330mm D: 530mm H: 325mm	14,5 kg
	Heating - 230V/500W	/ IP44.		1
	Aluminium external wa	lls and all-welded inner con	tainer. Polyurethane insulatior	1.
F	Aluminium door with ea	ccentric lock.		
1	Plastic stacking corners	s with stainless carrying han	dles.	
<b>S</b>	Product number: 1220	06-04 SDX Thermobox E 60	00 (4 GN 1/1)	

#### $\textbf{PORTABLE THERMOBOX}^{\circ} \textbf{ - Optional extras}$

Cooling plate	141002
Thermometer in door	123007

**4** GN 1/1

**4** GN 1/2

4 GN 1/2

**4** GN 1/1

#### TROLLEYS FOR PORTABLE THERMOBOX<sup>®</sup> AND FLEXI FOR GROCERIES



H78

H62	
MEASUREMENTS	WEIGHT
W: 660mm D: 440mm H: 175mm	5 kg
Adapted for: S600 & E600. Maximum load 200kgs. Zinc-plated angle profile construc 100mm castors, 2 fixed and 2 swiv	

tors with brakes.

H78S

MEASUREMENTS

W: 480mm

D: 660mm

H: 630mm

(900mm with handle)

Maximum load 200kgs.

Adapted for: S600 & E600.

platform – height 200mm.

Product number: 132003 H78S

Stainless steel construction 18/8.

125mm castors with rubber track, 2 fixed and 2 swivel castors with brakes.

Top platform – height 630mm. Bottom

WEIGHT

17,5 kg

Product number: 131001 SDX H62

H68



MEASUREMENTS	WEIGHT		
W: 470mm	13 kg		
D: 670mm	15 Kg		
H: 200mm (900mm with			
handle)			
Adapted for: S600 & E600.			
Maximum load 200kgs.			
Stainless steel construction 18/8	8.		
125mm castors with rubber trac	k, 2 fixed		
and 2 swivel castors with brakes.			
Product number: 132001 SDX H68			

#### **H78S TERRAIN**



MEASUREMENTS	WEIGHT
B: 480mm D: 660mm	17,5 kg
H: 630mm (900mm with handle)	_
Adapted for: S600 & E600. Maximum load: 200 kgs. Stainless steel structure 18/8. Top platform – height: 630 mm. Bottom platform – height: 200 n <b>Product number:</b> 132006 SDX H TERRAIN	

 MEASUREMENTS
 WEIGHT

 W: 450mm
 13 kg

 D: 660mm
 13 kg

 H: 450mm (900mm with handle)
 13 kg

 Adapted for: S600 & E600.
 Maximum load 200kgs.

 Stainless steel construction 18/8.
 125mm castors with rubber track, 2 fixed and 2 swivel castors with brakes.

 Product number: 132002 SDX H78

 EXTERIOR MEASUREMENTS
 WEIGHT

 W: 435mm
 40 kg

 D: 695mm
 40 kg

 H: 1265mm
 WINER MEASUREMENTS

 INNER MEASUREMENTS
 W: 405mm

 D: 625mm
 W: 405mm

 D: 625mm
 H: 1100mm

 The door can be locked in the closed or open position. 125 mm wheels with rubber tires, 2 braked and 2 fixed.


 Product number: 135001 SDX Flexi

FLEXI



# ESS-Norm<sup>®</sup> containers

As long ago as 1971, IDESTA became the first and only Scandinavian manufacturer to adopt the Gastronorm sizing standard, which is today the self-evident standard for all manufacturers and users of professional kitchen equipment. The Gastronorm system is based on the basic module of 325x530 mm, the sizes of which can be doubled or divided into two, three, four, six or nine parts.

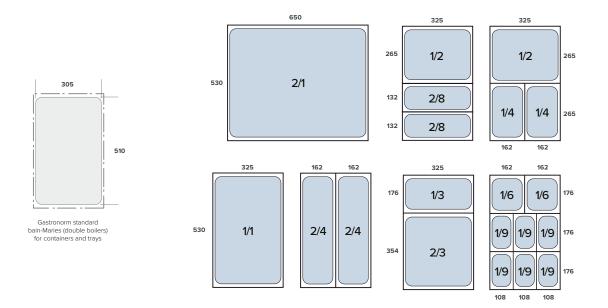

To accommodate the Scandinavian market, Idesta established the, now market leading, ESS-NORM\* system, which is compatible with the Gastronorm system.

ESS-NORM<sup>®</sup> ensures compatibility regarding lid fits and stacking of the different containers. ESS-NORM<sup>®</sup> containers are manufactured in 0.8 mm high quality 18/8 stainless steel, electrolytically polished to a finish that satisfies the highest hygienic demands. They meet the European Norm for materials used in connection with food processing, EN 631. Features such as lugs to facilitate stacking and foldable handles ensure fulfilment of any demands that can be placed on a stainless steel container. The range is completed with hermetic lids, perforated inserts, lids with and without handles, domed lids etc., making it possible to adapt containers to any requirement.

IDESTA ESS-NORM<sup>®</sup> implies containers for rational, safe and economical professional kitchen applications. They have unsurpassed durability, which means that operating costs and environmental impact are minimised.

#### IDESTA ESS-NORM° CONTAINERS



2/1 - 530 x 650	mm	Depth 20 mm	Depth 40 mm	Depth 65 mm	Depth 100 mm	Depth 150 mm	Depth 200 mm
	Containers	70020	70040	70050	70100	-	-
	Containers with perforation	-	70042	70052	70102	-	-
	Volume approx litres	-	11	19	28	-	-

1/1 - 530 x 325	mm	Depth 20 mm	Depth 40 mm	Depth 65 mm	Depth 100 mm	Depth 150 mm	Depth 200 mm
	Containers	71020	71040	71050	71100	71150	71200
	Containers with handles	-	71041	71051	71101	71151	71201
	Containers with perforation	71022	71042	71052	71102	71152	71202
	Containers with handles and perforation	-	71043	71053	71103	71153	71203
	Granite enamelled containers	710202	-	710502	-	-	-
	Fluon <sup>©</sup> coated containers	715203	715403	710503	-	-	-
	Volume approx litres	-	5	9	13,5	20,5	27

#### 2/3 - 354 x 325 mm Depth 20 mm Depth 40 mm Depth 65 mm Depth 100 mm Depth 150 mm Depth 200 mm Containers 72020 72040 72050 72100 72150 72200 Containers with handles -72041 72051 72101 72151 72201 Containers with 72042 72052 72102 72152 72202 perforation Containers with handles 72043 72053 72103 72153 72203 and perforation Volume approx litres 4 6 8,5 13 17,5 -

#### IDESTA ESS-NORM° CONTAINERS

/2 -325 x 26	65 mm	Depth 20 mm	Depth 40 mm	Depth 65 mm	Depth 100 mm	Depth 150 mm	Depth 200 mm
	Containers	73020	73040	73050	73100	73150	73200
	Containers with handles	-	73041	73051	73101	73151	73201
	Containers with perforation	-	73042	73052	73102	73152	73202
	Containers with handles and perforation	-	73043	73053	73103	73153	73203
	Volume approx litres	-	2,5	4	6	9	12

## 2/4 - 530 x 162 mm

1/2

2/4

1/3

1/4

2/8

1/6

Containers	73024	73044	73054	73104	-	-
Containers with handles	-	73045	73055	73105	-	-
Volume approx litres	-	2	3,5	5,5	-	-

Depth 40 mm

Depth 65 mm

Depth 100 mm

Depth 150 mm

Depth 200 mm

Depth 20 mm

1/3 - 176 x 325 n	nm	Depth 20 mm	Depth 40 mm	Depth 65 mm	Depth 100 mm	Depth 150 mm	Depth 200 mm
	Containers	74020	74040	74050	74100	74150	74200
	Containers with handles	-	74041	74051	74101	74151	74201
	Volume approx litres	-	1,6	2,5	3,5	5,5	7,5

1/4 - 265 x 162	mm	Depth 20 mm	Depth 40 mm	Depth 65 mm	Depth 100 mm	Depth 150 mm	Depth 200 mm
	Containers	-	-	75050	75100	75150	75200
	Containers with handles	-	-	75051	75101	75151	75201
	Volume approx litres		-	1,7	2,5	4,0	5,5

2/8 -132 x 325 r	nm	Depth 20 mm	Depth 40 mm	Depth 65 mm	Depth 100 mm	Depth 150 mm	Depth 200 mm
	Containers	-	-	75058	75108	-	-
	Volume approx litres	-	-	1,5	2,7	-	-

1/6 -176 x 162 m	m	Depth 20 mm	Depth 40 mm	Depth 65 mm	Depth 100 mm	Depth 150 mm	Depth 200 mm	
	Containers	-	-	76050	76100	76150	76200	
	Containers with handles	-	-	76051	76101	76151	76201	
	Volume approx litres	-	-	-	1,5	2,5	3,5	

1/9 - 108 x 176 r	nm	Depth 20 mm	Depth 40 mm	Depth 65 mm	Depth 100 mm	Depth 150 mm	Depth 200 mm
	Containers	-	-	77050	77100	-	-
	Volume approx litres	-	-	0,5	1	-	-

1/9



Lid with handle	1/1	2/3	1/2	1/3	1/4	2/8	1/6	1/9
300 standard	71300	72300	73300	74300	75300	75308	76300	77300
301 with wide brim to cover heated wells	71301	-	73301	-	-	-	-	-
320 recess for ladle	71320	72320	73320	74320	75320	-	76320	77320
330 hinged lid	71330	72330	73330	-	-	-	-	-
332 hinged lid with recess for ladle	71332	-	73332	-	-	-	-	-
365 with hermetic seal	71365	72365	73365	74365	75365		76365	
380 dome lid (H 40mm)	71380	-	-	-	-	-	-	-




Lid without handle	2/1	1/1	2/3	1/2	2/4	1/3	1/4	1/6	1/9
340 for low containers	-	71340	72340	73340	73344	74340	75340	76340	77340
385 cook-chill	-	71385	-	-	-	-	-	-	-

Trays	2/1	1/1	2/3	1/2	2/4	1/3	1/4	1/6	1/9
Depth 10 mm	-	71510	72510	73510	-	-	-	-	-
Depth 20 mm	70520	71520	72520	73520	-	-	-	-	-
Depth 40 mm	70540	71540	72540	73540	-	-	-	-	-



Perforated insert	1/2 (90 mm deep)	1/2 (140 mm deep)	1/2 (190 mm deep)	1/1 (140 mm deep)	1/1 (190 mm deep)
For 100 mm deep containers	73092	-	-	-	-
For 100 mm deep containers with handle	73093	-	-	-	
For 150 mm deep containers	-	73142	-	71142	-
For 150 mm deep containers with handle	-	73143	-	71143	-
For 200 mm deep containers	-	-	73192	-	71192
For 200 mm deep containers with handle		-	73193	-	71193

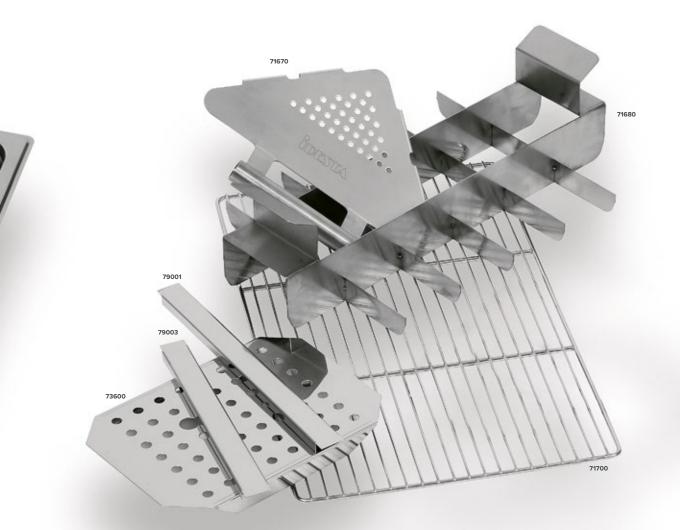

Strainer plate	1/1	2/3	1/2	2/4	1/3	1/4	2/8
	71600	72600	73600	73604	74600	75600	-

Support rail	265 mm	325 m	im 5	30 mm		Wire Gri	ds		2/1	1/1
	79003	7900	01 79	9005		Electro po steel	olished stainle	ess	70700	71700
Portion divide	er	9-parts	15-pa	rts	18-parts	20-parts	24-parts	GN	strainer	
GN 1/2		-	-		-	-	-			
GN 1/1		-	716	79	71680	71681	71682			71670
Lid accessorie	es	1/1	2/3	1/2	2/4	1/3	1/4	2/8	1/6	1/9
Replacement pl for hermetic lid		701	701	701	-	701	701	-	701	-



# **ABC** Containers

IDESTA ABC professional kitchen containers are manufactured according to EN 631 standards.IDESTA's ABC containers are sold worldwide and serve food on all corners of the earth. The nine sizes make it possible to use exactly the right container for the specific preparation, transport or serving purpose.



ABC containers are manufactured in high quality 18/8 stainless steel, electrolytically polished to a finish that satisfies the highest hygienic demands. They fulfil the European Norm for materials used in connection with food processing, EN 631. Extensive service life is guaranteed through the use of 0.8-1 mm thick steel.

They have unsurpassed durability, which means that operating costs and environmental impact are kept to a minimum.

**IDESTA ABC CONTAINERS** 

				R
A - Containers	A-1	A-2	A-3	A Lid
Order no.	42011	42021	42031	42050
Length mm	240	240	240	240
Width mm	240	240	240	240
Depth mm	235	160	75	-
Capacity litres	13,0	9,0	4,0	-

B - Containers	B-1	B-2	B-3	B Lid
Order no.	42111	42121	42131	42150
Length mm	155	155	155	155
Width mm	155	155	155	155
Depth mm	235	160	75	-
Capacity litres	5,0	3,5	1,5	-

C - Containers	C-2	C-3	C-4	C Lid
Order no.	42221	42231	42241	42250
Length mm	155	155	155	155
Width mm	105	105	105	105
Depth mm	160	75	55	-
Capacity litres	2,5	1,0	0,5	-

Å

С



## 

# Think inside the box

When you think inside the box, everything becomes obvious.

Our Thermoboxes have an inside that is fully welded and entirely in stainless steel with pressed guides directly from the side walls. This makes the inside completely without any joints.

That is the obvious choice.

WWW.SDX.SE

THE ORIGINAL MADE IN SWEDEN SINCE 1969

## SDX THERMOBOX Keeping the right temperature

TRANSPORTATION OF HOT AND COLD FOOD IN A HYGIENIC AND SUSTAINABLE WAY FOR BOTH HUMANS AND THE ENVIRONMENT



### SDX

Hofland grootkeuken Glasblazerstraat 10 2984 BL Ridderkerk info@hoflandgrootkeuken.nl +31 180 417533

